


D05 Standard Flow Parallel Manifold

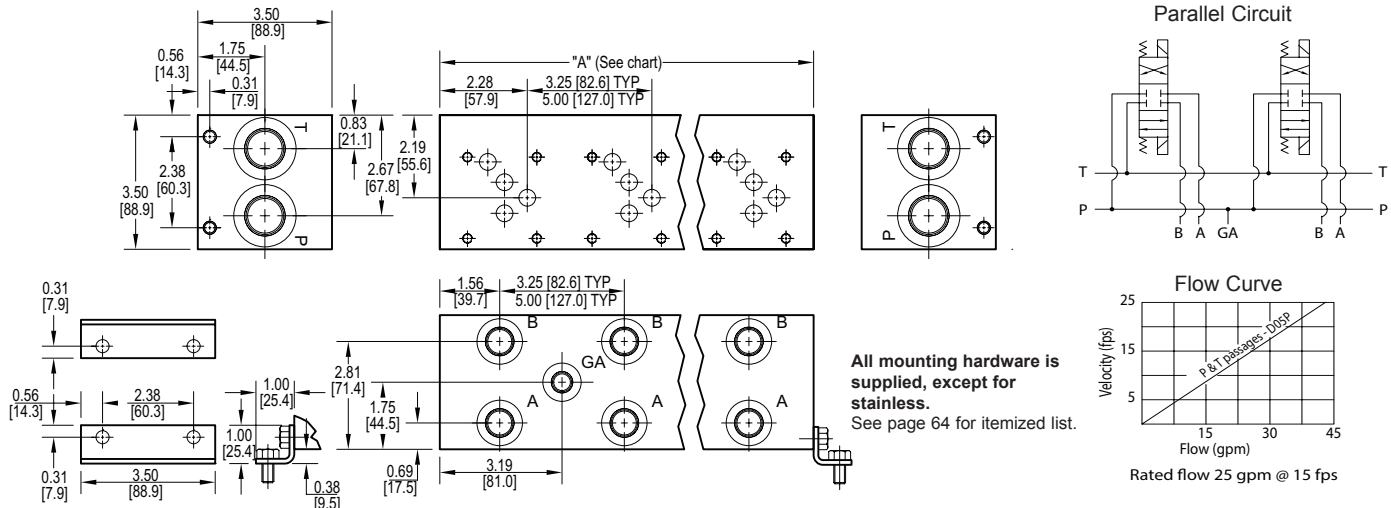

No. of stations	* 01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
"A" length (code 3 spa.) inch [mm]	3.25 [82.6]	6.50 [165.1]	9.75 [247.7]	13.00 [330.2]	16.25 [412.8]	19.50 [495.3]	22.75 [577.9]	26.00 [660.4]	29.25 [743.0]	32.50 [825.5]	35.75 [908.1]	39.00 [990.6]	42.25 [1073.2]	45.50 [1155.7]	48.75 [1238.3]	52.00 [1320.8]	55.25 [1403.4]	58.50 [1485.9]	61.75 [1568.5]	65.00 [1651.0]	68.25 [1733.6]
apx. weight alum lb [kg]	4 [2]	8 [4]	11 [5]	14 [7]	17 [8]	21 [10]	24 [11]	27 [12]	30 [14]	34 [15]	37 [17]	41 [19]	44 [20]	47 [21]	51 [23]	55 [25]	58 [26]	61 [28]	64 [29]	67 [30]	71 [32]
apx. weight ferrous lb [kg]	9 [4]	17 [8]	26 [12]	34 [15]	43 [20]	51 [23]	60 [27]	68 [31]	77 [35]	85 [39]	94 [43]	102 [46]	111 [50]	--	--	--	--	--	--	--	--
"A" length (code 5 spa.) inch [mm]	--	8.25 [209.6]	13.25 [336.6]	18.25 [463.6]	23.25 [590.6]	28.25 [717.6]	33.25 [844.6]	38.25 [971.6]	43.25 [1098.6]	48.25 [1225.6]	53.25 [1352.6]	58.25 [1479.6]	63.25 [1606.6]	68.25 [1733.6]							
apx. weight alum lb [kg]	--	9 [4]	15 [7]	20 [9]	25 [11]	30 [14]	35 [16]	41 [19]	46 [21]	50 [23]	55 [25]	60 [27]	65 [29]	71 [32]							
apx. weight ferrous lb [kg]	--	22 [10]	36 [16]	49 [22]	62 [28]	76 [34]	89 [40]	102 [46]	116 [53]	--	--	--	--	--							
															Port code		Valve mtg.		Manifold mtg.		
															P, S		0.25-20 UNC x 0.75 [19] DP		0.31-18 UNC x 0.44 [11.1] DP		
															B, M, T		M6 ISO 6H x 0.75 [19] DP		M8 ISO 6H x 0.44 [11.1] DP		

* Length of 01 station with relief cavity is 4.50 [114.3]. Gauge port not available on 01 station.

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information


For **coating options**
see pages 245-246.

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	Options
Material A Aluminum - 6061-T6 3000† psi • 20.7 MPa D Ductile Iron - D4512 5000† psi • 34.5 MPa S* Stainless Steel - 17-4 5000† psi • 34.5 MPa † Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type. <small>*All stainless steel products are passivated.</small>	Valve Pattern D05 ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information	Circuit P Parallel Circuit Standard Flow	No. of Stations Aluminum 01...21 Available with spacing code 3 02...14 Available with spacing code 5 Ductile Iron 01...12 Available with spacing code 3 02...09 Available with spacing code 5 Stainless Steel 01...06 Available with spacing code 3 02...04 Available with spacing code 5	Valve Spacing 3 3.25 inch 82.6 mm 5 5.00 inch 127.0 mm	Port Threads P* NPTF • ANSI B1.20.3 S SAE • ISO 11926 B BSPP • ISO 1179 M ISO • ISO 6149 T* BSPT • ISO 7 P & T A & B GA	Options See next page for available options and ordering codes.

* Pipe ports in stainless can experience galling

Options - D05 Standard Flow Parallel Manifold

Contact Daman for cavity locations if critical.

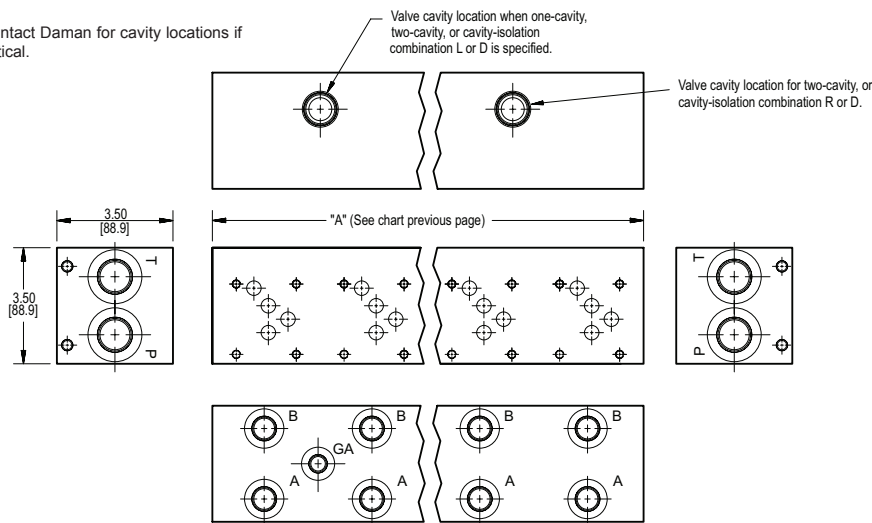


ISOLATIONS

Daman isolation options allow a manifold to have two independent pressure and/or tank ports. Isolations are drilled rather than plugged to ensure a leakproof and failproof isolation.

Ordering code letter:	* Isolation is between stations:	Available # of stations:
3.25 [82.6] spacing		
A	01 & 02	02-10
B	02 & 03	03-11
C	03 & 04	04-12
D	04 & 05	05-13
E	05 & 06	06-14
F	06 & 07	07-15
G	07 & 08	08-16
H	08 & 09	09-17
J	09 & 10	10-18
5.00 [127.0] spacing		
A	01 & 02	02-07
B	02 & 03	03-08
C	03 & 04	04-09
D	04 & 05	05-10
E	05 & 06	06-11
F	06 & 07	07-12


* Stations are numbered left to right.

Parallel Circuit with one or two Cavities

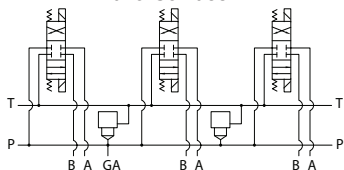


Valves with P in the nose and T out the side must be used.

Parallel Circuit with Isolations

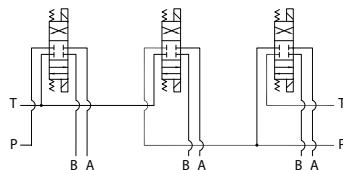

Manifold shown with P isolation between 1 & 2 (PA), and T isolation between 2 & 3 (TB).

Cavity & Isolation Combinations

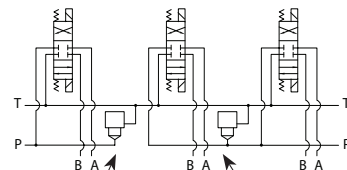

Option code L: Cavity left of isolation
Option code R: Cavity right of isolation
Option code D: includes both cavities

NOTES:

- The GA port is not available on a (1) station manifold.
- The GA port is not available when a pressure isolation is located between stations 1 & 2.
- Some cavity and isolation combinations are not possible with spacing code 2. Consult factory to determine availability.
- For /C cavity option, see page 226.9 for relief valve assembly option.

Ordering Information

...	Cavity	Pressure Isolation	Tank Isolation	Cavity & Isolation Combinations
-----	--------	--------------------	----------------	---------------------------------

Cavity	
Omit if cavities not required	
C	One Common cavity: With solenoid clearance. C10-2 (P in nose) See page 226.9 for assembly option.
CC	Two Common cavities: With solenoid clearance C10-2 (P in nose) Available 03-21 stations with spacing code 3; Available 02-14 stations with spacing code 5. Not available in combination with isolation options.
S	One Sun Cavity: T-3A (P in nose) See Tech Info for valves.

Pressure Isolation	
Omit if P isolation not required	
PA...PJ	Available with spacing code 3
PA...PF	Available with spacing code 5

Tank Isolation	
Omit if T isolation not required	
TA...TJ	Available with spacing code 3
TA...TF	Available with spacing code 5

Cavity & Isolation Combinations	
Specify when using a combination of cavity and isolation options. Cavities do have solenoid clearance.	
L	Cavity is located left of the isolation.
R	Cavity is located right of the isolation.
D	Two cavities, one each side of isolation. (Use with cavity option codes C or S only.)