


D05 Standard Flow Parallel Manifold

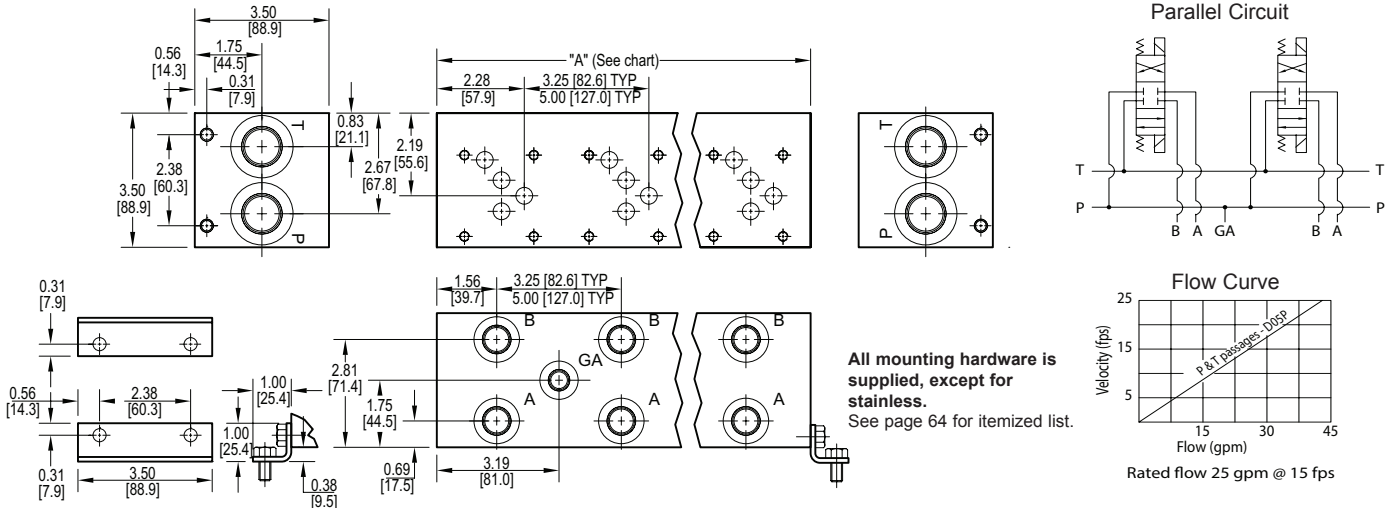

No. of stations	* 01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
"A" length (code 3 spa.) inch [mm]	3.25 [82.6]	6.50 [165.1]	9.75 [247.7]	13.00 [330.2]	16.25 [412.8]	19.50 [495.3]	22.75 [577.9]	26.00 [660.4]	29.25 [743.0]	32.50 [825.5]	35.75 [908.1]	39.00 [990.6]	42.25 [1073.2]	45.50 [1155.7]	48.75 [1238.3]	52.00 [1320.8]	55.25 [1403.4]	58.50 [1485.9]	61.75 [1568.5]	65.00 [1651.0]	68.25 [1733.6]
apx. weight alum lb [kg]	4 [2]	8 [4]	11 [5]	14 [7]	17 [8]	21 [10]	24 [11]	27 [12]	30 [14]	34 [15]	37 [17]	41 [19]	44 [20]	47 [21]	51 [23]	55 [25]	58 [26]	61 [28]	64 [29]	67 [30]	71 [32]
apx. weight ferrous lb [kg]	9 [4]	17 [8]	26 [12]	34 [15]	43 [20]	51 [23]	60 [27]	68 [31]	77 [35]	85 [39]	94 [43]	102 [46]	111 [50]	--	--	--	--	--	--	--	--
"A" length (code 5 spa.) inch [mm]	--	8.25 [209.6]	13.25 [336.6]	18.25 [463.6]	23.25 [590.6]	28.25 [717.6]	33.25 [844.6]	38.25 [971.6]	43.25 [1098.6]	48.25 [1225.6]	53.25 [1352.6]	58.25 [1479.6]	63.25 [1606.6]	68.25 [1733.6]							
apx. weight alum lb [kg]	--	9 [4]	15 [7]	20 [9]	25 [11]	30 [14]	35 [16]	41 [19]	46 [21]	50 [23]	55 [25]	60 [27]	65 [29]	71 [32]							
apx. weight ferrous lb [kg]	--	22 [10]	36 [16]	49 [22]	62 [28]	76 [34]	89 [40]	102 [46]	116 [53]	--	--	--	--	--							

Port code	Valve mtg.	Manifold mtg.
P, S	0.25-20 UNC x 0.75 [19] DP	0.31-18 UNC x 0.44 [11.1] DP
B, M, T	M6 ISO 6H x 0.75 [19] DP	M8 ISO 6H x 0.44 [11.1] DP

* Length of 01 station with relief cavity is 4.50 [114.3]. Gauge port not available on 01 station.

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information


For **coating options** see pages 245-246.

Material	Valve Pattern	Circuit	No. of Stations	Valve Spacing	Port Threads	Options																																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Material</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">A</td> <td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td> </tr> <tr> <td style="text-align: center;">D</td> <td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td> </tr> <tr> <td style="text-align: center;">S*</td> <td>Stainless Steel - 17-4 5000† psi • 34.5 MPa</td> </tr> <tr> <td colspan="2" style="font-size: small;">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td> </tr> </tbody> </table> <p style="font-size: x-small;">*All stainless steel products are passivated.</p>	Material		A	Aluminum - 6061-T6 3000† psi • 20.7 MPa	D	Ductile Iron - D4512 5000† psi • 34.5 MPa	S*	Stainless Steel - 17-4 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Valve Pattern</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">D05</td> <td>ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information</td> </tr> </tbody> </table>	Valve Pattern		D05	ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Circuit</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">P</td> <td>Parallel Circuit Standard Flow</td> </tr> </tbody> </table>	Circuit		P	Parallel Circuit Standard Flow	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">No. of Stations</th> </tr> </thead> <tbody> <tr> <td colspan="2" style="text-align: center;">Aluminum</td> </tr> <tr> <td style="text-align: center;">01...21</td> <td>Available with spacing code 3</td> </tr> <tr> <td style="text-align: center;">02...14</td> <td>Available with spacing code 5</td> </tr> <tr> <td colspan="2" style="text-align: center;">Ductile Iron</td> </tr> <tr> <td style="text-align: center;">01...12</td> <td>Available with spacing code 3</td> </tr> <tr> <td style="text-align: center;">02...09</td> <td>Available with spacing code 5</td> </tr> <tr> <td colspan="2" style="text-align: center;">Stainless Steel</td> </tr> <tr> <td style="text-align: center;">01...06</td> <td>Available with spacing code 3</td> </tr> <tr> <td style="text-align: center;">02...04</td> <td>Available with spacing code 5</td> </tr> </tbody> </table>	No. of Stations		Aluminum		01...21	Available with spacing code 3	02...14	Available with spacing code 5	Ductile Iron		01...12	Available with spacing code 3	02...09	Available with spacing code 5	Stainless Steel		01...06	Available with spacing code 3	02...04	Available with spacing code 5	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Valve Spacing</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">3</td> <td>3.25 inch 82.6 mm</td> </tr> <tr> <td style="text-align: center;">5</td> <td>5.00 inch 127.0 mm</td> </tr> </tbody> </table>	Valve Spacing		3	3.25 inch 82.6 mm	5	5.00 inch 127.0 mm	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Port Threads</th> </tr> <tr> <th></th> <th>P & T</th> <th>A & B</th> <th>GA</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">P*</td> <td>NPTF • ANSI B1.20.3</td> <td>0.75</td> <td>0.50</td> </tr> <tr> <td style="text-align: center;">S</td> <td>SAE • ISO 11926</td> <td>-12</td> <td>-8</td> </tr> <tr> <td style="text-align: center;">B</td> <td>BSPP • ISO 1179</td> <td>0.75</td> <td>0.50</td> </tr> <tr> <td style="text-align: center;">M</td> <td>ISO • ISO 6149</td> <td>M27</td> <td>M18</td> </tr> <tr> <td style="text-align: center;">T*</td> <td>BSPT • ISO 7</td> <td>0.75</td> <td>0.50</td> </tr> </tbody> </table>	Port Threads					P & T	A & B	GA	P*	NPTF • ANSI B1.20.3	0.75	0.50	S	SAE • ISO 11926	-12	-8	B	BSPP • ISO 1179	0.75	0.50	M	ISO • ISO 6149	M27	M18	T*	BSPT • ISO 7	0.75	0.50	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2">Options</th> </tr> </thead> <tbody> <tr> <td colspan="2">See next page for available options and ordering codes.</td> </tr> </tbody> </table>	Options		See next page for available options and ordering codes.	
Material																																																																																		
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																																																																	
D	Ductile Iron - D4512 5000† psi • 34.5 MPa																																																																																	
S*	Stainless Steel - 17-4 5000† psi • 34.5 MPa																																																																																	
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																																																																		
Valve Pattern																																																																																		
D05	ISO 4401-05-04 NFPA T3.5.1-D05 See Tech Information																																																																																	
Circuit																																																																																		
P	Parallel Circuit Standard Flow																																																																																	
No. of Stations																																																																																		
Aluminum																																																																																		
01...21	Available with spacing code 3																																																																																	
02...14	Available with spacing code 5																																																																																	
Ductile Iron																																																																																		
01...12	Available with spacing code 3																																																																																	
02...09	Available with spacing code 5																																																																																	
Stainless Steel																																																																																		
01...06	Available with spacing code 3																																																																																	
02...04	Available with spacing code 5																																																																																	
Valve Spacing																																																																																		
3	3.25 inch 82.6 mm																																																																																	
5	5.00 inch 127.0 mm																																																																																	
Port Threads																																																																																		
	P & T	A & B	GA																																																																															
P*	NPTF • ANSI B1.20.3	0.75	0.50																																																																															
S	SAE • ISO 11926	-12	-8																																																																															
B	BSPP • ISO 1179	0.75	0.50																																																																															
M	ISO • ISO 6149	M27	M18																																																																															
T*	BSPT • ISO 7	0.75	0.50																																																																															
Options																																																																																		
See next page for available options and ordering codes.																																																																																		

* Pipe ports in stainless can experience galling

Options - D05 Standard Flow Parallel Manifold

Contact Daman for cavity locations if critical.

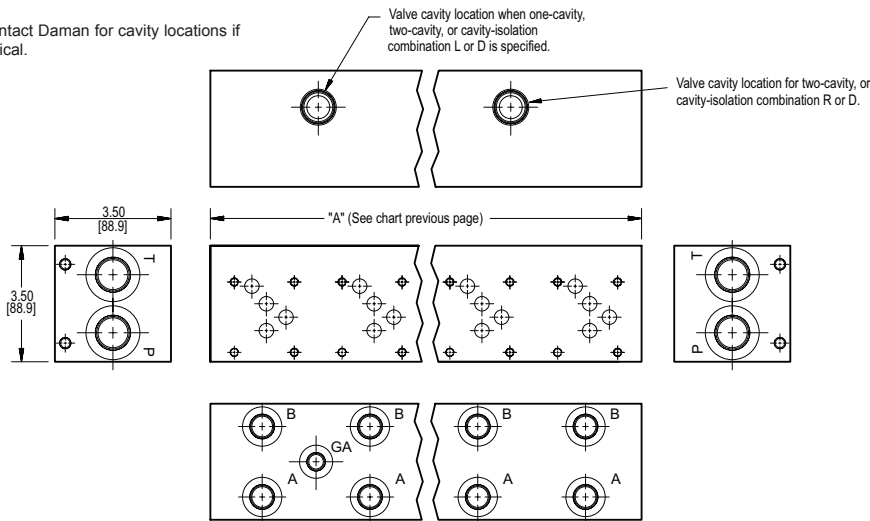


ISOLATIONS

Daman isolation options allow a manifold to have two independent pressure and/or tank ports. Isolations are drilled rather than plugged to ensure a leakproof and failproof isolation.


Ordering code letter:	* Isolation is between stations:	Available # of stations:
3.25 [82.6] spacing		
A	01 & 02	02-10
B	02 & 03	03-11
C	03 & 04	04-12
D	04 & 05	05-13
E	05 & 06	06-14
F	06 & 07	07-15
G	07 & 08	08-16
H	08 & 09	09-17
J	09 & 10	10-18
5.00 [127.0] spacing		
A	01 & 02	02-07
B	02 & 03	03-08
C	03 & 04	04-09
D	04 & 05	05-10
E	05 & 06	06-11
F	06 & 07	07-12

Parallel Circuit with one or two Cavities




Valves with P in the nose and T out the side must be used.

Parallel Circuit with Isolations



Manifold shown with P isolation between 1 & 2 (PA), and T isolation between 2 & 3 (TB).

Cavity & Isolation Combinations



Option code L
Cavity left of isolation

Option code R
Cavity right of isolation

Option code D includes both cavities

* Stations are numbered left to right.

NOTES:

- 1) The GA port is not available on a (1) station manifold.
- 2) The GA port is not available when a pressure isolation is located between stations 1 & 2.
- 3) Some cavity and isolation combinations are not possible with spacing code 3. Consult factory to determine availability.

Ordering Information



Cavity	
Omit if cavities not required	
C	One Common cavity: With solenoid clearance. C-10-2 (P in nose) For valves w/1" hex max.
CC	Two Common cavities: With solenoid clearance C-10-2 (P in nose) Available 03-21 stations with spacing code 3; Available 02-14 stations with spacing code 5. Not available in combination with isolation options.
S	One Sun Cavity: T-3A (P in nose) See Tech Info for valves.

Pressure Isolation	
Omit if P isolation not required	
PA...PJ	Available with spacing code 3
PA...PF	Available with spacing code 5

Tank Isolation	
Omit if T isolation not required	
TA...TJ	Available with spacing code 3
TA...TF	Available with spacing code 5

Cavity & Isolation Combinations	
Specify when using a combination of cavity and isolation options. Cavities do have solenoid clearance.	
L	Cavity is located left of the isolation.
R	Cavity is located right of the isolation.
D	Two cavities, one each side of isolation. (Use with cavity option codes C or S only.)