




Daman S01 Servo Subplate

0.480 Port Circle

Side Ported Subplate

Valve mtg: UNC #6-32 x 0.50 DP or
Metric M4-0.7mm ISO 6H x [12] DP
Subplate hardware kit is supplied.
See page 154 for itemized list.

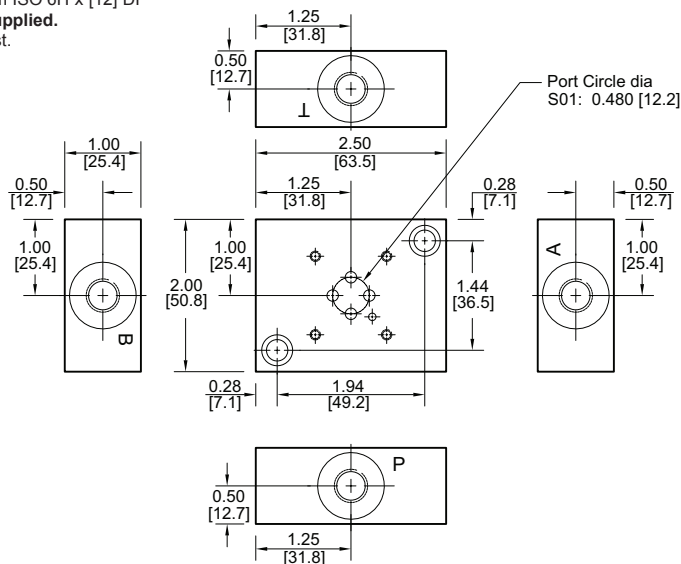

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material		Servo Valve Pattern		Product Type		Port Location		Port Threads	
Material				Product Type				Port Threads	
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa			SP	Subplate			4S	-4 SAE ISO 11926; SAE 1926
D	Ductile Iron - D4512 5000† psi • 34.5 MPa							4M	M10 x 1.0 ISO 6149
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.									
		Servo Pattern				Port Location			
		S01 ISO 10372-01-01 Daman std. S01 See page 139 and Tech Info				S Side ported			

For coating options
see pages 245-246.