




Daman S73 Servo Subplate

1.375 Port Circle

Side Ported Subplate

Valve mtg: UNC 0.31-18 x 0.88 DP or
Metric M8-1.25mm ISO 6H x [22.2] DP
Subplate hardware kit is supplied.
See page 154 for itemized list.

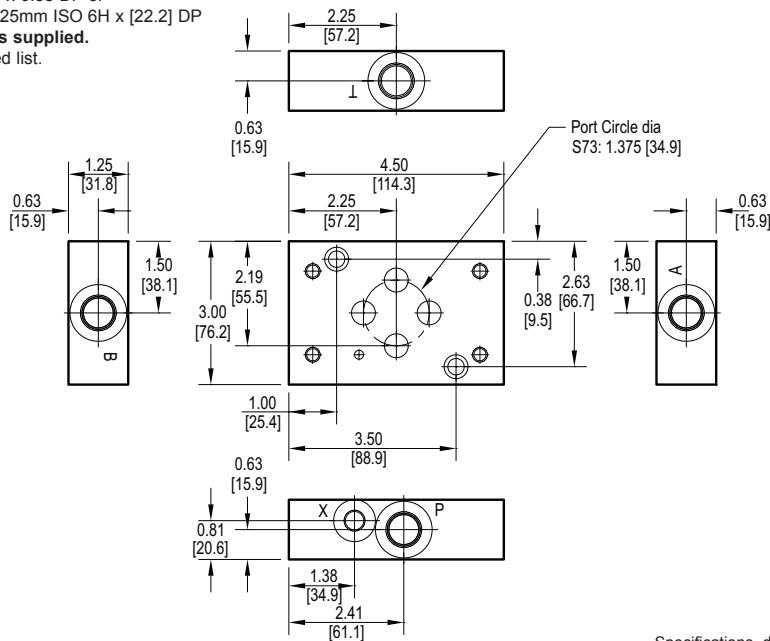

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material		Servo Valve Pattern		Product Type		Port Location		Port Threads																											
<table><tr><th colspan="2">Material</th></tr><tr><td>A</td><td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td></tr><tr><td>D</td><td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td></tr><tr><td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td></tr></table>		Material		A	Aluminum - 6061-T6 3000† psi • 20.7 MPa	D	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table><tr><th colspan="2">Servo Pattern</th></tr><tr><td>S73</td><td>Daman S73 See page 139 and Tech Info</td></tr></table>		Servo Pattern		S73	Daman S73 See page 139 and Tech Info	<table><tr><th colspan="2">Product Type</th></tr><tr><td>SP</td><td>Subplate</td></tr></table>		Product Type		SP	Subplate	<table><tr><th colspan="2">Port Location</th></tr><tr><td>S</td><td>Side ported</td></tr></table>		Port Location		S	Side ported	<table><tr><th colspan="2">Port Threads</th></tr><tr><td>8S</td><td>-8 SAE ISO 11926; SAE 1926 (X port is -4 SAE)</td></tr><tr><td>8M</td><td>M18 x 1.5 ISO 6149 (X port is M10 x 1.0)</td></tr></table>		Port Threads		8S	-8 SAE ISO 11926; SAE 1926 (X port is -4 SAE)	8M	M18 x 1.5 ISO 6149 (X port is M10 x 1.0)
Material																																			
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																		
D	Ductile Iron - D4512 5000† psi • 34.5 MPa																																		
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																			
Servo Pattern																																			
S73	Daman S73 See page 139 and Tech Info																																		
Product Type																																			
SP	Subplate																																		
Port Location																																			
S	Side ported																																		
Port Threads																																			
8S	-8 SAE ISO 11926; SAE 1926 (X port is -4 SAE)																																		
8M	M18 x 1.5 ISO 6149 (X port is M10 x 1.0)																																		

For **coating options**
see pages 245-246.