


Daman S74 Servo Subplate

1.750 Port Circle

Side Ported Subplate

Valve mtg: UNF 0.31-24 x 0.88 DP or
Metric M8-1.25mm ISO 6H x [22.2] DP

Subplate hardware kit is supplied.
See page 154 for itemized list.

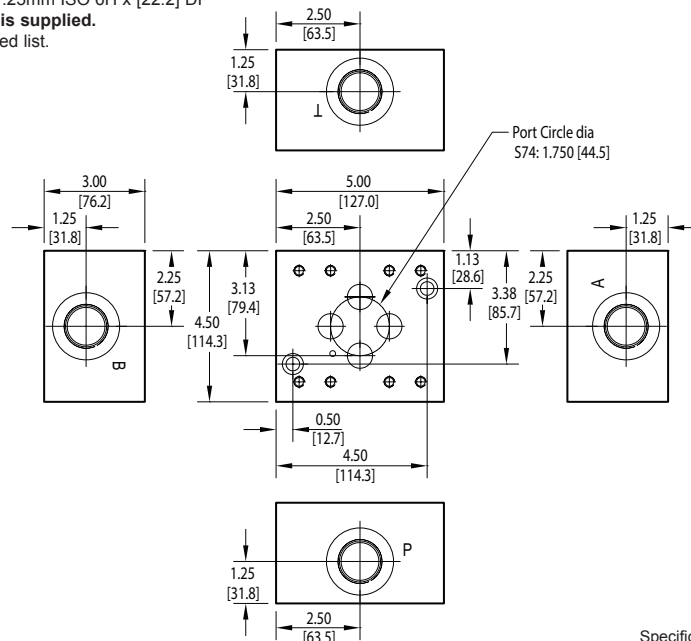

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material		Servo Valve Pattern		Product Type		Port Location		Port Threads																											
<table><tr><th colspan="2">Material</th></tr><tr><td>A</td><td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td></tr><tr><td>D</td><td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td></tr><tr><td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td></tr></table>		Material		A	Aluminum - 6061-T6 3000† psi • 20.7 MPa	D	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.		<table><tr><th colspan="2">Servo Pattern</th></tr><tr><td>S74</td><td>Daman S74 See page 139 and Tech Info</td></tr></table>		Servo Pattern		S74	Daman S74 See page 139 and Tech Info	<table><tr><th colspan="2">Product Type</th></tr><tr><td>SP</td><td>Subplate</td></tr></table>		Product Type		SP	Subplate	<table><tr><th colspan="2">Port Location</th></tr><tr><td>S</td><td>Side ported</td></tr></table>		Port Location		S	Side ported	<table><tr><th colspan="2">Port Threads</th></tr><tr><td>16S</td><td>-16 SAE ISO 11926; SAE 1926</td></tr><tr><td>16M</td><td>M33 x 2.0 ISO 6149</td></tr></table>		Port Threads		16S	-16 SAE ISO 11926; SAE 1926	16M	M33 x 2.0 ISO 6149
Material																																			
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa																																		
D	Ductile Iron - D4512 5000† psi • 34.5 MPa																																		
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																																			
Servo Pattern																																			
S74	Daman S74 See page 139 and Tech Info																																		
Product Type																																			
SP	Subplate																																		
Port Location																																			
S	Side ported																																		
Port Threads																																			
16S	-16 SAE ISO 11926; SAE 1926																																		
16M	M33 x 2.0 ISO 6149																																		

For **coating options**
see pages 245-246.