


Daman S82, S87 Servo Subplates


S82 Side Ported Subplate

Valve mtg: Metric M4-0.7mm ISO 6H x 0.50 [12.7] DP
Subplate hardware kit is supplied.
 See page 154 for itemized list.

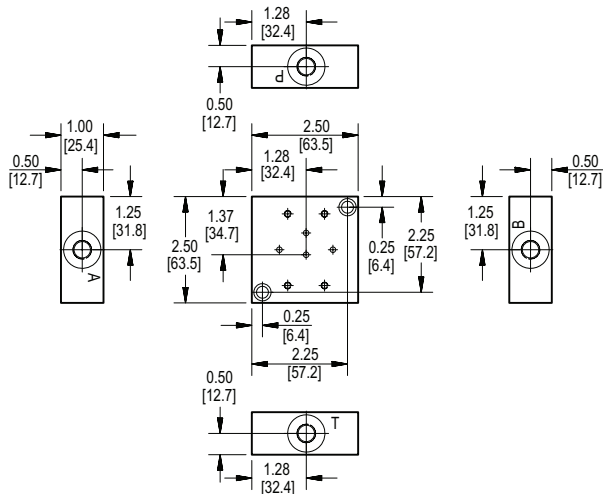

S87 Side Ported Subplate

Valve mtg: UNC 0.31-18 x 0.88 DP or
 Metric M8-1.25mm ISO 6H x [22] DP
Subplate hardware kit is supplied.
 See page 154 for itemized list.

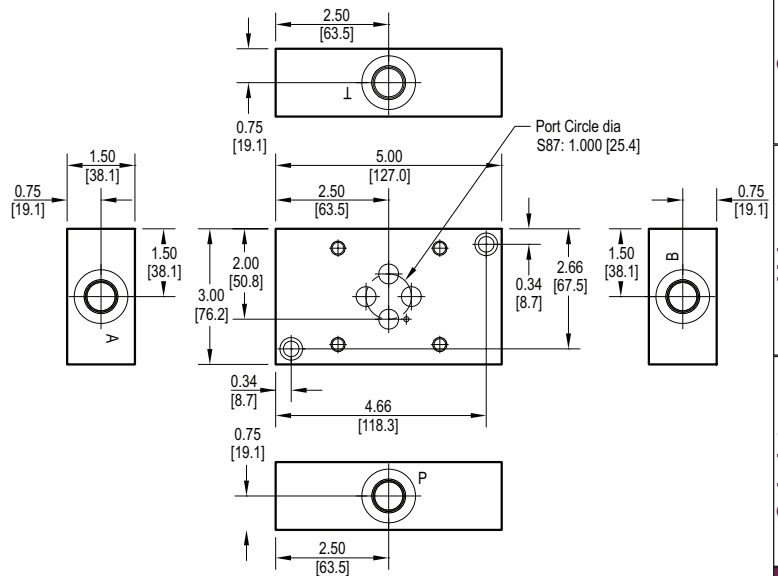

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information


Material		Servo Valve Pattern		Product Type		Port Location		Port Threads	

For **coating options**
 see pages 245-246.

Daman S90, S92 Servo Subplate


S90 Side Ported Subplate

Valve mtg: UNC #10-24 x 0.63 DP or
Metric M5-0.8mm ISO 6H x [16] DP
Subplate hardware kit is supplied.
See page 154 for itemized list.

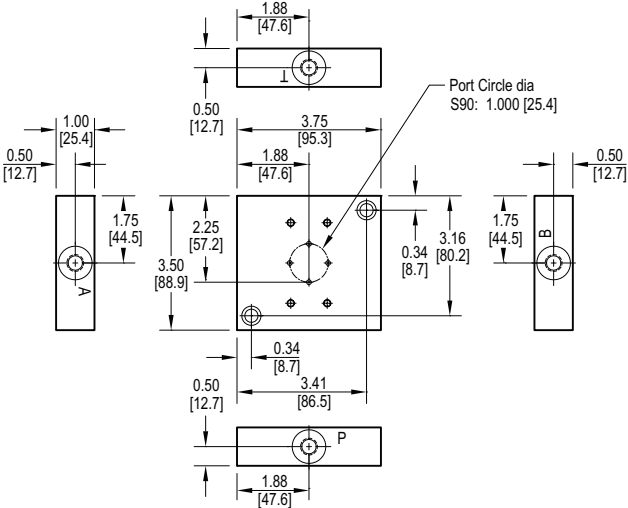

S92 Side Ported Subplate

Valve mtg: UNC #8-32 x 0.63 DP or
Metric M4-0.7mm ISO 6H x [16] DP
Subplate hardware kit is supplied.
See page 154 for itemized list.

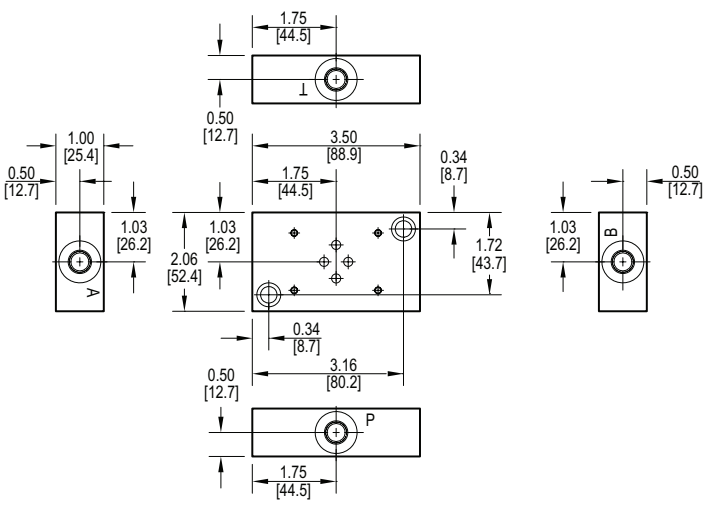

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Material		Servo Valve Pattern		Product Type		Port Location		Port Threads																			
<table><tr><th colspan="2">Material</th></tr><tr><td>A</td><td>Aluminum - 6061-T6 3000† psi • 20.7 MPa</td></tr><tr><td>D</td><td>Ductile Iron - D4512 5000† psi • 34.5 MPa</td></tr><tr><td colspan="2">† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.</td></tr></table>		Material		A	Aluminum - 6061-T6 3000† psi • 20.7 MPa	D	Ductile Iron - D4512 5000† psi • 34.5 MPa	† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.				<table><tr><th colspan="2">Product Type</th></tr><tr><td>SP</td><td>Subplate</td></tr></table>		Product Type		SP	Subplate			<table><tr><th colspan="2">Port Threads</th></tr><tr><td>4S</td><td>-4 SAE ISO 11926; SAE 1926</td></tr><tr><td>4M</td><td>M10 x 1.0 ISO 6149</td></tr></table>		Port Threads		4S	-4 SAE ISO 11926; SAE 1926	4M	M10 x 1.0 ISO 6149
Material																											
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa																										
D	Ductile Iron - D4512 5000† psi • 34.5 MPa																										
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.																											
Product Type																											
SP	Subplate																										
Port Threads																											
4S	-4 SAE ISO 11926; SAE 1926																										
4M	M10 x 1.0 ISO 6149																										
		<table><tr><th colspan="2">Servo Pattern</th></tr><tr><td>S90</td><td>Daman S90 See page 140 and Tech Info</td></tr><tr><td>S92</td><td>Daman S92 See page 140 and Tech Info</td></tr></table>		Servo Pattern		S90	Daman S90 See page 140 and Tech Info	S92	Daman S92 See page 140 and Tech Info			<table><tr><th colspan="2">Port Location</th></tr><tr><td>S</td><td>Side ported</td></tr></table>		Port Location		S	Side ported										
Servo Pattern																											
S90	Daman S90 See page 140 and Tech Info																										
S92	Daman S92 See page 140 and Tech Info																										
Port Location																											
S	Side ported																										

For **coating options**
see pages 245-246.