


Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

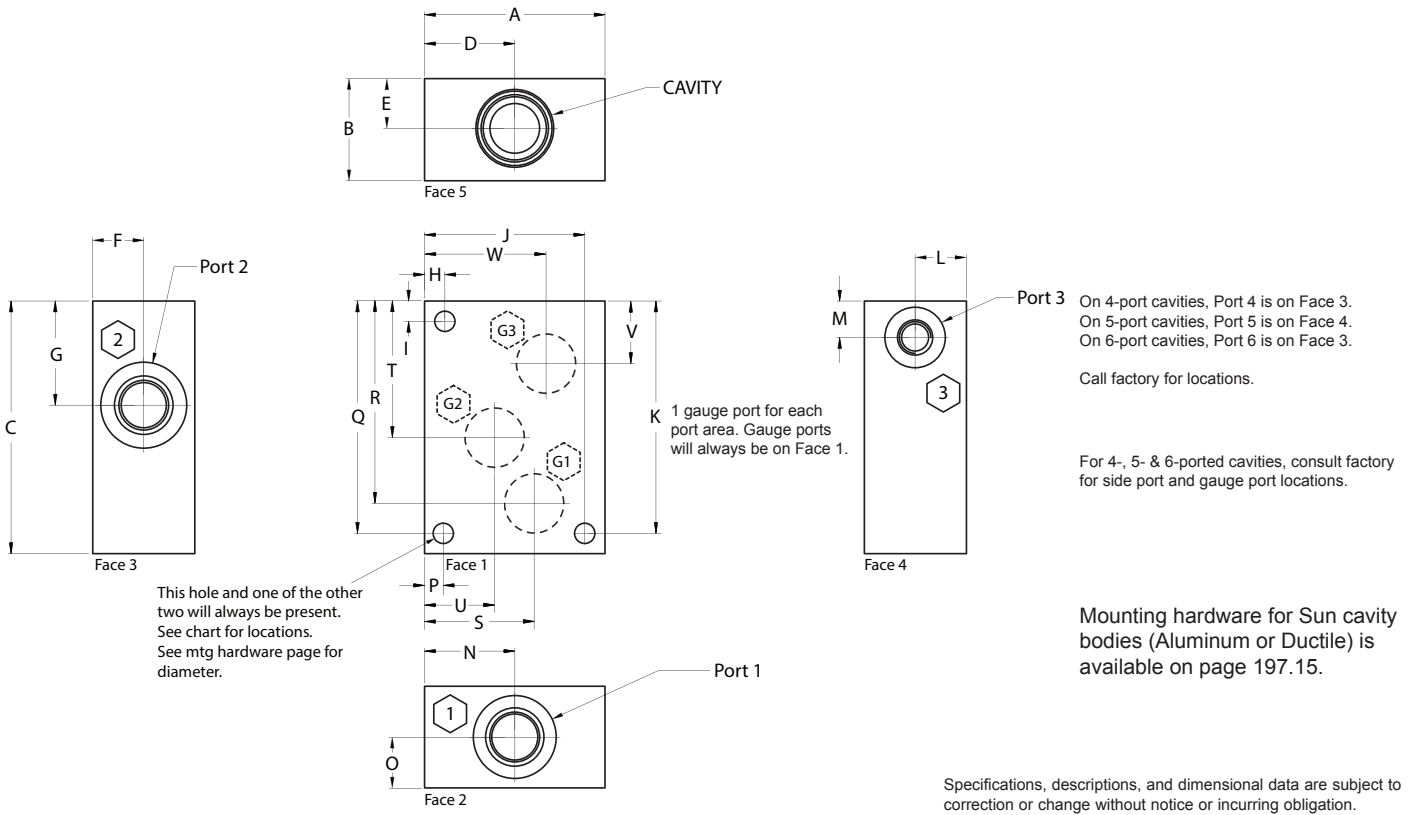

Ordering Information

Daman can sell Sun valves. See page 227 for stocked valves, or consult factory for price and delivery of valves not shown.

For coating options see pages 245-246.

Material	Sun Cavity Size	Product Type	Port Size	Port Threads	/	G
----------	-----------------	--------------	-----------	--------------	---	---

Material	
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa
D	Ductile Iron - D4512 5000† psi • 34.5 MPa

† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.

Sun Cavity Size					
T2A	T11A	T21A	T33A	T63A	
T3A	T13A	T22A	T52A	T64A	
T5A	T16A	T23A	T53A	T162A	
T8A	T17A	T24A	T54A	T163A	
T9A	T18A	T31A	T61A	---	
T10A	T19A	T32A	T62A	---	

Size of Port 1 & 2	
4	1/4 inch (-4) Hose/Fitting size (M) port threads = M10 x 1.0
6	3/8 inch (-6) Hose/Fitting size (M) port threads = M14 x 1.5
8	1/2 inch (-8) Hose/Fitting size (M) port threads = M18 x 1.5
12	3/4 inch (-12) Hose/Fitting size (M) port threads = M27 x 2.0
16	1 inch (-16) Hose/Fitting size (M) port threads = M33 x 2.0
20	1-1/4 inch (-20) Hose/Fitting size (M) port threads = M42 x 2.0

Port Threads	
P	NPTF ANSI B1.20.3
S	SAE ISO 11926; SAE 1926
B	BSPP ISO 1179
M	ISO ISO 6149
T	BSPT ISO 7

Gauge Port	
G	Gauge Port
0.250 NPTF (P option)	
0.250 BSPP (B option)	
0.250 BSPT (T option)	
M10 x 1.0 (M option)	
-6 SAE (S option)	

Port "style" of gauge port is determined by selection of "port threads".

Product Type	
CB	Cavity Bodies

Consult chart for port size availability with each cavity size, and for additional port sizes.

Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

Part Number	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6
T2ACB4/G	3.00	2.00	3.25	1.63	0.75	0.75	1.44	-	-	2.72	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.63	1.44	0.88	0.51	2.34	1/4	1/4	1/4	-	-	-
T2ACB6/G	3.00	2.00	3.25	1.63	0.75	0.75	1.44	-	-	2.72	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.63	1.44	0.88	0.51	2.34	3/8	3/8	3/8	-	-	-
T2ACB8/G	3.00	2.00	3.25	1.63	0.75	0.75	1.44	-	-	2.72	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.63	1.44	0.88	0.51	2.34	1/2	1/2	3/8	-	-	-
T2ACB12/G	3.00	2.25	3.25	1.63	1.00	1.00	1.44	-	-	2.72	2.97	1.00	0.51	1.63	1.00	0.28	2.97	2.44	2.09	1.44	1.00	0.51	2.34	3/4	3/4	3/8	-	-	-
T3ACB4/G	2.00	2.00	3.00	1.16	0.75	0.75	1.09	0.22	0.22	-	-	-	-	1.16	0.75	0.22	2.78	2.22	1.16	1.09	0.78	-	-	1/4	1/4	-	-	-	-
T3ACB6/G	2.00	2.00	3.00	1.16	0.75	0.75	1.09	0.22	0.22	-	-	-	-	1.16	0.75	0.22	2.78	2.22	1.16	1.09	0.78	-	-	3/8	3/8	-	-	-	-
T3ACB8/G	2.00	2.00	3.00	1.16	0.75	0.75	1.09	0.22	0.22	-	-	-	-	1.16	0.75	0.22	2.78	2.22	1.16	1.09	0.78	-	-	1/2	1/2	-	-	-	-
T3ACB12/G	2.25	2.25	3.00	1.41	0.88	0.88	1.07	0.22	0.22	-	-	-	-	1.41	0.88	0.22	2.78	2.22	1.41	1.07	0.94	-	-	3/4	3/4	-	-	-	-
T5ACB4/G	2.25	2.00	3.00	1.25	0.75	0.75	0.88	-	-	2.03	2.78	-	-	1.25	0.75	0.22	2.78	2.09	1.25	0.88	0.84	-	-	1/4	1/4	-	-	-	-
T5ACB6/G	2.25	2.00	3.00	1.25	0.75	0.75	0.88	-	-	2.03	2.78	-	-	1.25	0.75	0.22	2.78	2.09	1.25	0.88	0.84	-	-	3/8	3/8	-	-	-	-
T5ACB8/G	2.25	2.00	3.00	1.25	0.75	0.75	0.88	-	-	2.03	2.78	-	-	1.25	0.75	0.22	2.78	2.09	1.25	0.88	0.84	-	-	1/2	1/2	-	-	-	-
T5ACB12/G	2.50	2.25	3.00	1.56	0.88	0.88	0.88	-	-	2.28	2.78	-	-	1.47	0.88	0.22	2.78	2.00	1.56	0.88	1.00	-	-	3/4	3/4	-	-	-	-
T8ACB4/G	2.00	2.00	1.75	1.16	0.75	0.75	0.52	-	-	1.78	0.22	-	-	1.16	0.75	0.22	1.53	1.18	1.41	0.52	0.59	-	-	1/4	1/4	-	-	-	-
T8ACB6/G	2.00	2.00	1.75	1.16	0.75	0.75	0.52	-	-	1.78	0.22	-	-	1.16	0.75	0.22	1.53	1.18	1.41	0.52	0.59	-	-	3/8	3/8	-	-	-	-
T9ACB4/G	2.50	1.75	2.00	1.25	0.75	0.75	0.90	-	-	2.28	1.78	0.75	0.53	1.25	0.75	0.22	1.78	1.44	1.53	0.90	0.66	0.53	1.94	1/4	1/4	1/4	-	-	-
T9ACB6/G	2.50	1.75	2.00	1.25	0.75	0.75	0.90	-	-	2.28	1.78	0.75	0.53	1.25	0.75	0.22	1.78	1.44	1.53	0.90	0.66	0.53	1.94	3/8	3/8	1/4	-	-	-
T10ACB4/G	1.63	2.00	2.50	0.94	0.63	0.63	0.96	0.22	0.22	-	-	-	-	0.94	0.63	0.22	2.28	1.94	0.94	0.96	0.59	-	-	1/4	1/4	-	-	-	-
T10ACB6/G	1.63	2.00	2.50	0.94	0.63	0.63	0.96	0.22	0.22	-	-	-	-	0.94	0.63	0.22	2.28	1.94	0.94	0.96	0.59	-	-	3/8	3/8	-	-	-	-
T10ACB8/G	2.25	2.00	3.00	1.44	0.88	0.88	0.85	-	-	2.03	2.00	-	-	1.25	0.88	0.22	2.00	2.00	1.25	0.85	1.25	-	-	1/2	1/2	-	-	-	-
T10ACB12/G	2.25	2.00	3.00	1.44	0.88	0.88	0.85	-	-	2.03	2.00	-	-	1.25	0.88	0.22	2.00	2.00	1.25	0.85	1.25	-	-	3/4	3/4	-	-	-	-
T11ACB4/G	2.50	1.75	3.00	1.25	0.63	0.63	1.41	-	-	2.28	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.59	1.41	0.75	0.47	1.81	1/4	1/4	1/4	-	-	-
T11ACB6/G	2.50	1.75	3.00	1.25	0.63	0.63	1.41	-	-	2.28	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.59	1.41	0.75	0.47	1.81	3/8	3/8	3/8	-	-	-
T11ACB8/G	2.50	1.75	3.00	1.25	0.63	0.63	1.41	-	-	2.28	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.59	1.41	0.75	0.47	1.81	1/2	1/2	3/8	-	-	-
T13ACB4/G	1.75	1.75	2.25	0.94	0.63	0.63	0.78	-	-	1.53	2.03	-	-	0.94	0.63	0.22	2.03	1.69	0.97	0.78	0.53	-	-	1/4	1/4	-	-	-	-
T13ACB6/G	1.75	1.75	2.25	0.94	0.63	0.63	0.78	-	-	1.53	2.03	-	-	0.94	0.63	0.22	2.03	1.69	0.97	0.78	0.53	-	-	3/8	3/8	-	-	-	-
T13ACB8/G	2.50	2.00	3.00	1.63	0.88	0.88	0.85	-	-	2.28	2.78	-	-	1.44	0.88	0.22	2.78	1.94	1.63	0.84	1.63	-	-	1/2	1/2	-	-	-	-
T13ACB12/G	2.50	2.00	3.00	1.63	0.88	0.88	0.85	-	-	2.28	2.78	-	-	1.44	0.88	0.22	2.78	1.94	1.63	0.84	1.63	-	-	3/4	3/4	-	-	-	-
T16ACB12/G	3.00	2.50	4.00	1.94	1.25	1.25	1.44	0.28	0.28	-	-	-	-	1.75	1.25	0.28	3.72	2.94	1.31	1.44	1.03	-	-	3/4	3/4	-	-	-	-
T16ACB16/G	3.00	2.50	4.00	1.94	1.25	1.25	1.44	0.28	0.28	-	-	-	-	1.75	1.25	0.28	3.72	2.94	1.31	1.44	1.03	-	-	1	1	-	-	-	-
T16ACB20/G	3.00	2.50	4.00	1.94	1.25	1.25	1.44	0.28	0.28	-	-	-	-	1.75	1.25	0.28	3.72	2.94	1.03	1.44	1.31	-	-	1 1/4	1 1/4	-	-	-	-
T17ACB12/G	4.00	2.50	4.25	2.00	1.25	1.25	1.91	-	-	3.72	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	2.00	1.91	1.25	0.60	3.09	3/4	3/4	1/2	-	-	-
T17ACB16/G	4.00	2.50	4.25	2.00	1.25	1.25	1.91	-	-	3.72	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	2.00	1.91	1.25	0.60	3.09	1	1	1/2	-	-	-
T17ACB20/G	4.00	2.50	4.25	2.00	1.25	1.25	1.91	-	-	3.72	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	2.00	1.91	1.25	0.60	3.09	1 1/4	1 1/4	1/2	-	-	-
T18ACB12/G	3.50	3.00	4.50	2.06	1.38	1.38	1.73	0.34	0.34	-	-	-	-	2.06	1.38	0.34	4.16	3.50	2.06	1.73	1.03	-	-	3/4	3/4	-	-	-	-
T18ACB16/G	3.50	3.00	4.50	2.06	1.38	1.38	1.73	0.34	0.34	-	-	-	-	2.06	1.38	0.34	4.16	3.50	2.06	1.73	1.03	-	-	1	1	-	-	-	-
T18ACB20/G	3.50	3.00	4.50	2.06	1.38	1.38	1.73	0.34	0.34	-	-	-	-	2.06	1.38	0.34	4.16	3.50	2.06	1.73	1.03	-	-	1 1/4	1 1/4	-	-	-	-
T19ACB16/G	4.38	3.00	5.00	2.22	1.50	1.50	2.54	-	-	4.03	4.66	1.50	0.75	2.22	1.50	0.34	4.66	4.06	2.22	2.54	1.25	0.75	3.38	1	1	3/4	-	-	-
T19ACB20/G	4.38	3.00	5.00	2.22	1.50	1.50	2.54	-	-	4.03	4.66	1.50	0.75	2.22	1.50	0.34	4.66	4.06	2.22	2.54	1.25	0.75	3.38	1 1/4	1 1/4	3/4	-	-	-
T21ACB4/G	2.50	2.00	3.56	1.25	0.63	0.63	1.98	-	-	2.28	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.50	1.98	0.75	1.07	1.84	1/4	1/4	1/4	1/4	-	-
T21ACB6/G	2.50	2.00	3.56	1.25	0.63	0.63	1.98	-	-	2.28	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.50	1.98	0.75	1.07	1.84	3/8	3/8	3/8	1/4	-	-
T21ACB8/G	2.50	2.00	3.56	1.25	0.63	0.63	1.98	-	-	2.28	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.50	1.98	0.75	1.07	1.84	1/2	1/2	3/8	1/4	-	-
T22ACB6/G	3.50	2.25	3.75	1.75	1.00	1.00	2.04	-	-	3.22	3.47	1.00	1.10	1.75	1.00	0.28	3.47	3.07	1.75	2.04	1.09	1.10	2.78	3/8	3/8	3/8	3/8	-	-
T22ACB8/G	3.50	2.25	3.75	1.75	1.00	1.00	2.04	-	-	3.22	3.47	1.00	1.10	1.75	1.00	0.28	3.47	3.07	1.75	2.04	1.09	1.10	2.78	1/2	1/2	3/8	3/8	-	-
T22ACB12/G	3.50	2.25	4.00	1.75	1.00	1.00	2.04	-	-	3.22	3.72	1.00	1.10	1.75	1.00	0.28	3.72	3.07	1.75	2.04	1.09	1.10	2.78	3/4	3/4	3/8	3/8	-	-
T23ACB12/G	4.00	2.50	4.75	2.22	1.25	1.25	2.63	-	-	3.72	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.91	2.63	1.44	1.35	3.22	3/4	3/4	1/2	3/8	-	-
T23ACB16/G	4.00	2.50	4.75	2.22	1.25	1.25	2.63	-	-	3.72	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.91	2.63	1.44	1.35	3.22	1	1	1/2	3/8	-	-
T23ACB20/G	4.00	2.50	4.75	2.22	1.25	1.25	2.63	-	-	3.72	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.91	2.63	1.44	1.35	3.22	1 1/4	1 1/4	1/2	3/8	-	-
T24ACB16/G	5.00	3.00	5.87	2.50	1.50	1.50	3.38	-	-	4.66	5.53	1.50	1.60	2.50	1.50	0.34	5.53	4.91	2.50	3.38	1.50	1.60	3.75	1	1	3/4	1/2	-	-
T24ACB20/G	5.00	3.00	5.87	2.50	1.50	1.50	3.38	-	-	4.66	5.53	1.50	1.60	2.50	1.50	0.34													



Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

Part Number	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6
T31ACB4/G	2.75	2.25	4.75	1.38	0.63	0.63	2.72	-	-	2.53	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	1.38	2.72	0.78	1.82	1.94	1/4	1/4	1/4	1/4	-	-
T31ACB6/G	2.75	2.25	4.75	1.38	0.63	0.63	2.72	-	-	2.53	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	1.38	2.72	0.78	1.82	1.94	3/8	3/8	3/8	3/8	-	-
T31ACB8/G	2.75	2.25	4.75	1.38	0.63	0.63	2.72	-	-	2.53	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	1.38	2.72	0.78	1.82	1.94	1/2	1/2	1/2	1/2	-	-
T32ACB6/G	3.50	2.00	5.25	1.75	1.00	1.00	2.98	-	-	3.22	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	1.75	2.98	1.09	2.02	2.41	3/8	3/8	3/8	3/8	-	-
T32ACB8/G	3.50	2.00	5.25	1.75	1.00	1.00	2.98	-	-	3.22	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	1.75	2.98	1.09	2.02	2.41	1/2	1/2	1/2	1/2	-	-
T32ACB12/G	3.50	2.00	5.25	1.75	1.00	1.00	2.98	-	-	3.22	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	1.75	2.98	1.09	2.02	2.41	3/4	3/4	3/4	3/4	-	-
T33ACB12/G	4.00	2.25	6.38	2.00	1.13	1.13	3.71	-	-	3.66	6.03	1.13	2.53	2.00	1.13	0.34	6.03	5.11	2.00	3.71	1.09	2.53	2.91	3/4	3/4	3/4	3/4	-	-
T33ACB16/G	4.00	2.25	6.38	2.00	1.13	1.13	3.71	-	-	3.66	6.03	1.13	2.53	2.00	1.13	0.34	6.03	5.11	2.00	3.71	1.09	2.53	2.91	1	1	1	1	-	-
T33ACB20/G	4.00	3.00	6.50	2.00	1.50	1.50	3.71	-	-	3.66	6.16	1.50	2.53	2.00	1.50	0.34	6.16	5.11	2.00	3.71	1.09	2.53	2.91	1 1/4	1 1/4	1 1/4	1 1/4	-	-
T52ACB6/G	3.50	2.25	6.25	1.75	1.00	1.00	4.40	-	-	3.22	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	1.75	4.40	1.06	3.43	2.44	3/8	3/8	3/8	3/8	3/8	3/8
T52ACB8/G	3.50	2.25	6.25	1.75	1.00	1.00	4.40	-	-	3.22	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	1.75	4.40	1.06	3.43	2.44	1/2	1/2	1/2	1/2	1/2	3/8
T52ACB12/G	3.50	2.25	6.25	1.75	1.00	1.00	4.40	-	-	3.22	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	1.75	4.40	1.06	3.43	2.44	3/4	3/4	3/4	3/4	3/4	3/8
T53ACB12/G	4.00	3.00	7.63	2.00	1.50	1.50	5.52	-	-	3.66	7.28	1.50	4.35	2.00	1.50	0.34	7.28	6.63	2.00	5.52	0.94	4.35	3.06	3/4	3/4	3/4	3/4	3/4	1/2
T53ACB16/G	4.00	3.00	7.63	2.00	1.50	1.50	5.52	-	-	3.66	7.28	1.50	4.35	2.00	1.50	0.34	7.28	6.63	2.00	5.52	0.94	4.35	3.06	1	1	1	1	1	1/2
T54ACB20/G	5.00	4.00	10.00	2.50	2.00	2.00	7.22	-	-	4.66	9.66	2.00	5.66	2.50	2.00	0.34	9.66	8.75	2.50	7.22	1.00	5.66	4.00	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	3/4
T61ACB4/G	2.75	2.25	5.62	1.38	0.63	0.63	3.94	-	-	2.53	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	1.38	3.94	0.72	3.03	2.03	1/4	1/4	1/4	1/4	1/4	1/4
T61ACB6/G	2.75	2.25	5.62	1.38	0.63	0.63	3.94	-	-	2.53	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	1.38	3.94	0.72	3.03	2.03	3/8	3/8	3/8	3/8	3/8	1/4
T61ACB8/G	2.75	2.25	5.62	1.38	0.63	0.63	3.94	-	-	2.53	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	1.38	3.94	0.72	3.03	2.03	1/2	1/2	1/2	1/2	3/8	1/4
T62ACB6/G	3.50	2.25	6.25	1.75	1.00	1.00	4.33	-	-	3.22	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	1.75	4.33	1.00	3.38	2.50	3/8	3/8	3/8	3/8	3/8	3/8
T62ACB8/G	3.50	2.25	6.25	1.75	1.00	1.00	4.33	-	-	3.22	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	1.75	4.33	1.00	3.38	2.50	1/2	1/2	1/2	1/2	3/8	3/8
T62ACB12/G	3.50	2.25	6.25	1.75	1.00	1.00	4.33	-	-	3.22	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	1.75	4.33	1.00	3.38	2.50	3/4	3/4	3/4	3/4	3/8	3/8
T63ACB12/G	4.00	2.25	7.75	2.00	1.13	1.13	5.30	-	-	3.66	7.41	1.13	4.13	2.00	1.13	0.34	7.41	6.63	2.00	5.30	1.09	4.13	2.91	3/4	3/4	3/4	3/4	1/2	3/8
T63ACB16/G	4.00	2.25	7.75	2.00	1.13	1.13	5.30	-	-	3.66	7.41	1.13	4.13	2.00	1.13	0.34	7.41	6.63	2.00	5.30	1.09	4.13	2.91	1	1	1	1	1/2	3/8
T63ACB20/G	4.50	3.00	8.00	2.25	1.50	1.50	5.30	-	-	4.16	7.66	1.50	4.13	2.25	1.50	0.34	7.66	6.63	2.25	5.30	1.09	4.13	3.41	1 1/4	1 1/4	1 1/4	1 1/4	1/2	3/8
T64ACB16/G	5.00	3.00	9.62	2.50	1.50	1.50	6.51	-	-	4.66	9.28	1.50	5.01	2.50	1.50	0.34	9.28	8.21	2.50	6.51	1.25	5.01	3.75	1	1	1	1	3/4	1/2
T64ACB20/G	5.00	3.00	9.62	2.50	1.50	1.50	6.51	-	-	4.66	9.28	1.50	5.01	2.50	1.50	0.34	9.28	8.21	2.50	6.51	1.25	5.01	3.75	1 1/4	1 1/4	1 1/4	1 1/4	3/4	1/2
T162ACB4/G	1.88	2.00	2.00	1.06	0.63	0.63	0.67	-	-	1.66	1.78	-	-	1.06	0.63	0.22	1.78	1.50	0.84	0.63	1.35	-	-	1/4	1/4	-	-	-	-
T162ACB6/G	1.88	2.00	2.00	1.06	0.63	0.63	0.67	-	-	1.66	1.78	-	-	1.06	0.63	0.22	1.78	1.50	0.84	0.63	1.35	-	-	3/8	3/8	-	-	-	-
T162ACB8/G	2.00	1.75	2.25	1.23	0.63	0.63	0.67	-	-	1.78	1.22	-	-	1.23	0.63	0.22	2.03	1.53	0.91	0.63	1.35	-	-	1/2	1/2	-	-	-	-
T163ACB4/G	2.25	1.75	2.75	1.10	0.63	0.63	1.28	-	-	2.03	2.53	0.63	0.46	1.10	0.63	0.22	2.53	2.16	1.25	1.28	0.63	0.50	1.66	1/4	1/4	1/4	-	-	-
T163ACB6/G	2.25	1.75	2.75	1.10	0.63	0.63	1.28	-	-	2.03	2.53	0.63	0.46	1.10	0.63	0.22	2.53	2.16	1.25	1.28	0.63	0.50	1.66	3/8	3/8	3/8	-	-	-
T163ACB8/G	2.75	1.75	3.00	1.38	0.63	0.63	1.28	-	-	2.53	2.78	0.63	0.46	1.38	0.63	0.22	2.78	2.16	1.50	1.28	0.88	0.50	1.91	1/2	1/2	3/8	-	-	-

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.