


Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

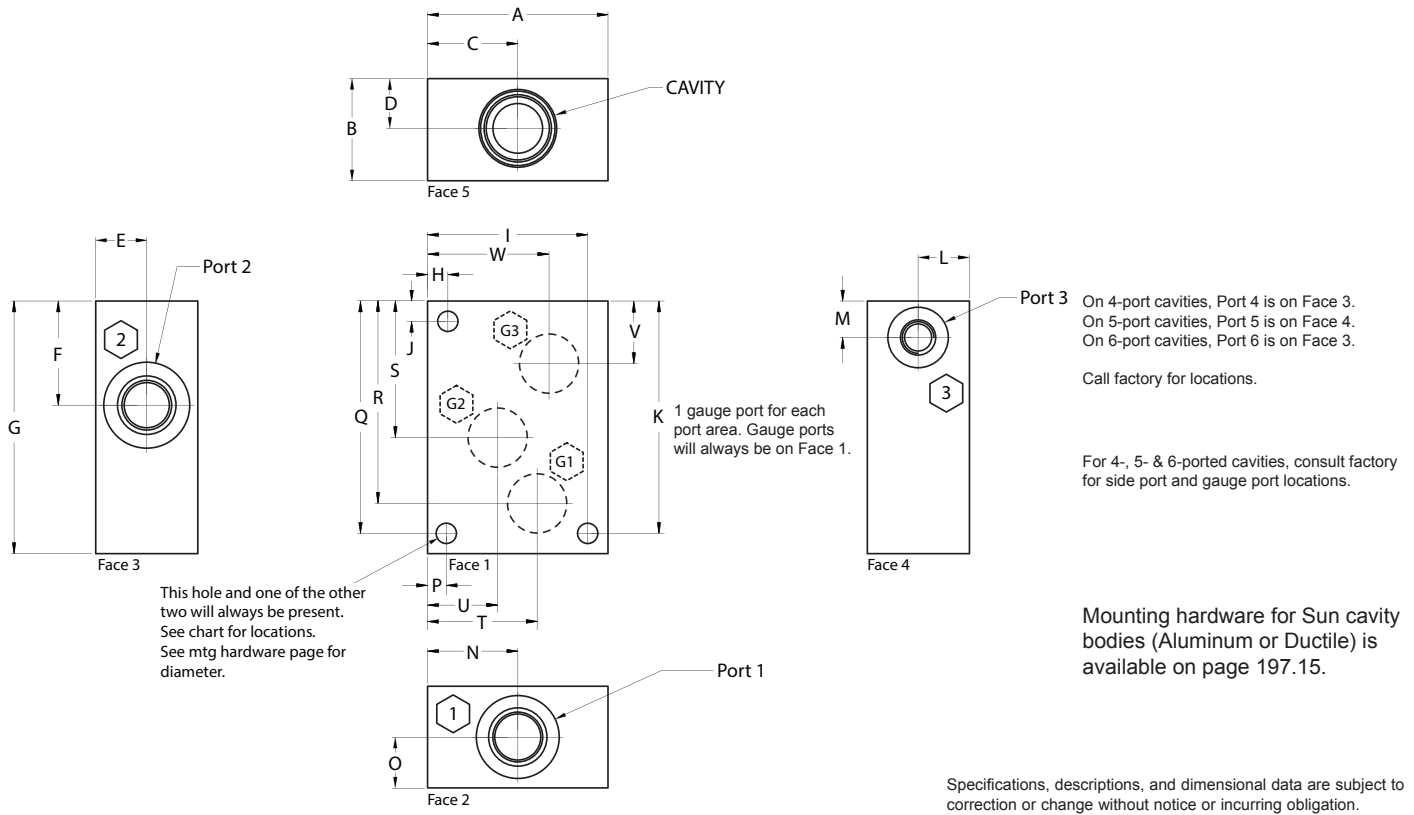

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.

Ordering Information

Daman can sell Sun valves. See page 227 for stocked valves, or consult factory for price and delivery of valves not shown.

For coating options see pages 245-246.

Material	Sun Cavity Size	Product Type	Port Size	Port Threads	/	G
----------	-----------------	--------------	-----------	--------------	---	---

Material	
A	Aluminum - 6061-T6 3000† psi • 20.7 MPa
D	Ductile Iron - D4512 5000† psi • 34.5 MPa
† Working pressure should be considered in accordance with ISO 4413 to determine appropriate material type.	

Sun Cavity Size					
T2A	T11A	T21A	T33A	T63A	
T3A	T13A	T22A	T52A	T64A	
T5A	T16A	T23A	T53A	T162A	
T8A	T17A	T24A	T54A	T163A	
T9A	T18A	T31A	T61A	---	
T10A	T19A	T32A	T62A	---	

Size of Port 1 & 2	
4	1/4 inch (-4) Hose/Fitting size (M) port threads = M10 x 1.0
6	3/8 inch (-6) Hose/Fitting size (M) port threads = M14 x 1.5
8	1/2 inch (-8) Hose/Fitting size (M) port threads = M18 x 1.5
12	3/4 inch (-12) Hose/Fitting size (M) port threads = M27 x 2.0
16	1 inch (-16) Hose/Fitting size (M) port threads = M33 x 2.0
20	1-1/4 inch (-20) Hose/Fitting size (M) port threads = M42 x 2.0

Port Threads	
P	NPTF ANSI B1.20.3
S	SAE ISO 11926; SAE 1926
B	BSPP ISO 1179
M	ISO ISO 6149
T	BSPT ISO 7

Gauge Port	
G	Gauge Port
0.250 NPTF (P option)	
0.250 BSPP (B option)	
0.250 BSPT (T option)	
M10 x 1.0 (M option)	
-6 SAE (S option)	
Port "style" of gauge port is determined by selection of "port threads".	

Product Type	
CB	Cavity Bodies

Consult chart for port size availability with each cavity size, and for additional port sizes.

Custom Products
Standard Manifolds
Cover Plates
Valve Adaptors
Subplates
Servo Valve Subplates
Tapping Plates
Cartridge Valve Cavity Bodies
Header and Junction Blocks
Technical Information

Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

Part Number	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6
T2ACB4/G	3.00	2.00	1.63	0.75	0.75	1.44	3.25	-	2.72	-	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.44	1.63	0.88	0.51	2.34	1/4	1/4	1/4	-	-	-
T2ACB6/G	3.00	2.00	1.63	0.75	0.75	1.44	3.25	-	2.72	-	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.44	1.63	0.88	0.51	2.34	3/8	3/8	3/8	-	-	-
T2ACB8/G	3.00	2.00	1.63	0.75	0.75	1.44	3.25	-	2.72	-	2.97	0.75	0.51	1.63	0.75	0.28	2.97	2.47	1.44	1.63	0.88	0.51	2.34	1/2	1/2	3/8	-	-	-
T2ACB12/G	3.00	2.25	1.63	1.00	1.00	1.44	3.25	-	2.72	-	2.97	1.00	0.51	1.63	1.00	0.28	2.97	2.44	1.44	2.09	1.00	0.51	2.34	3/4	3/4	3/8	-	-	-
T3ACB4/G	2.00	2.00	1.16	0.75	0.75	1.09	3.00	0.22	-	0.22	-	-	-	1.16	0.75	0.22	2.78	2.22	1.09	1.16	0.78	-	-	1/4	1/4	-	-	-	-
T3ACB6/G	2.00	2.00	1.16	0.75	0.75	1.09	3.00	0.22	-	0.22	-	-	-	1.16	0.75	0.22	2.78	2.22	1.09	1.16	0.78	-	-	3/8	3/8	-	-	-	-
T3ACB8/G	2.00	2.00	1.16	0.75	0.75	1.09	3.00	0.22	-	0.22	-	-	-	1.16	0.75	0.22	2.78	2.22	1.09	1.16	0.78	-	-	1/2	1/2	-	-	-	-
T3ACB12/G	2.25	2.25	1.41	0.88	0.88	1.07	3.00	0.22	-	0.22	-	-	-	1.41	0.88	0.22	2.78	2.22	1.07	1.41	0.94	-	-	3/4	3/4	-	-	-	-
T5ACB4/G	2.25	2.00	1.25	0.75	0.75	0.88	3.00	-	2.03	-	2.78	-	-	1.25	0.75	0.22	2.78	2.09	0.88	1.25	0.84	-	-	1/4	1/4	-	-	-	-
T5ACB6/G	2.25	2.00	1.25	0.75	0.75	0.88	3.00	-	2.03	-	2.78	-	-	1.25	0.75	0.22	2.78	2.09	0.88	1.25	0.84	-	-	3/8	3/8	-	-	-	-
T5ACB8/G	2.25	2.00	1.25	0.75	0.75	0.88	3.00	-	2.03	-	2.78	-	-	1.25	0.75	0.22	2.78	2.09	0.88	1.25	0.84	-	-	1/2	1/2	-	-	-	-
T5ACB12/G	2.50	2.25	1.56	0.88	0.88	0.88	3.00	-	2.28	-	2.78	-	-	1.47	0.88	0.22	2.78	2.00	0.88	1.56	1.00	-	-	3/4	3/4	-	-	-	-
T8ACB4/G	2.00	2.00	1.16	0.75	0.75	0.52	1.75	-	1.78	-	0.22	-	-	1.16	0.75	0.22	1.53	1.18	0.52	1.41	0.59	-	-	1/4	1/4	-	-	-	-
T8ACB6/G	2.00	2.00	1.16	0.75	0.75	0.52	1.75	-	1.78	-	0.22	-	-	1.16	0.75	0.22	1.53	1.18	0.52	1.41	0.59	-	-	3/8	3/8	-	-	-	-
T9ACB4/G	2.50	1.75	1.25	0.75	0.75	0.90	2.00	-	2.28	-	1.78	0.75	0.53	1.25	0.75	0.22	1.78	1.44	0.90	1.53	0.66	0.53	1.94	1/4	1/4	1/4	-	-	-
T9ACB6/G	2.50	1.75	1.25	0.75	0.75	0.90	2.00	-	2.28	-	1.78	0.75	0.53	1.25	0.75	0.22	1.78	1.44	0.90	1.53	0.66	0.53	1.94	3/8	3/8	1/4	-	-	-
T10ACB4/G	1.63	2.00	0.94	0.63	0.63	0.96	2.50	0.22	-	0.22	-	-	-	0.94	0.63	0.22	2.28	1.94	0.96	0.94	0.59	-	-	1/4	1/4	-	-	-	-
T10ACB6/G	1.63	2.00	0.94	0.63	0.63	0.96	2.50	0.22	-	0.22	-	-	-	0.94	0.63	0.22	2.28	1.94	0.96	0.94	0.59	-	-	3/8	3/8	-	-	-	-
T10ACB8/G	2.25	2.00	1.44	0.88	0.88	0.85	3.00	-	2.03	-	2.00	-	-	1.25	0.88	0.22	2.00	2.00	0.85	1.25	1.25	-	-	1/2	1/2	-	-	-	-
T10ACB12/G	2.25	2.00	1.44	0.88	0.88	0.85	3.00	-	2.03	-	2.00	-	-	1.25	0.88	0.22	2.00	2.00	0.85	1.25	1.25	-	-	3/4	3/4	-	-	-	-
T11ACB4/G	2.50	1.75	1.25	0.63	0.63	1.41	3.00	-	2.28	-	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.41	1.59	0.75	0.47	1.81	1/4	1/4	1/4	-	-	-
T11ACB6/G	2.50	1.75	1.25	0.63	0.63	1.41	3.00	-	2.28	-	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.41	1.59	0.75	0.47	1.81	3/8	3/8	3/8	-	-	-
T11ACB8/G	2.50	1.75	1.25	0.63	0.63	1.41	3.00	-	2.28	-	2.78	0.63	0.47	1.25	0.63	0.22	2.78	2.38	1.41	1.59	0.75	0.47	1.81	1/2	1/2	3/8	-	-	-
T13ACB4/G	1.75	1.75	0.94	0.63	0.63	0.78	2.25	-	1.53	-	2.03	-	-	0.94	0.63	0.22	2.03	1.69	0.78	0.97	0.53	-	-	1/4	1/4	-	-	-	-
T13ACB6/G	1.75	1.75	0.94	0.63	0.63	0.78	2.25	-	1.53	-	2.03	-	-	0.94	0.63	0.22	2.03	1.69	0.78	0.97	0.53	-	-	3/8	3/8	-	-	-	-
T13ACB8/G	2.50	2.00	1.63	0.88	0.88	0.85	3.00	-	2.28	-	2.78	-	-	1.44	0.88	0.22	2.78	1.94	0.84	1.63	1.63	-	-	1/2	1/2	-	-	-	-
T13ACB12/G	2.50	2.00	1.63	0.88	0.88	0.85	3.00	-	2.28	-	2.78	-	-	1.44	0.88	0.22	2.78	1.94	0.84	1.63	1.63	-	-	3/4	3/4	-	-	-	-
T16ACB12/G	3.00	2.50	1.94	1.25	1.25	1.44	4.00	0.28	-	0.28	-	-	-	1.75	1.25	0.28	3.72	2.94	1.44	1.31	1.03	-	-	3/4	3/4	-	-	-	-
T16ACB16/G	3.00	2.50	1.94	1.25	1.25	1.44	4.00	0.28	-	0.28	-	-	-	1.75	1.25	0.28	3.72	2.94	1.44	1.31	1.03	-	-	1	1	-	-	-	-
T16ACB20/G	3.00	2.50	1.94	1.25	1.25	1.44	4.00	0.28	-	0.28	-	-	-	1.75	1.25	0.28	3.72	2.94	1.44	1.03	1.31	-	-	1 1/4	1 1/4	-	-	-	-
T17ACB12/G	4.00	2.50	2.00	1.25	1.25	1.91	4.25	-	3.72	-	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	1.91	2.00	1.25	0.60	3.09	3/4	3/4	1/2	-	-	-
T17ACB16/G	4.00	2.50	2.00	1.25	1.25	1.91	4.25	-	3.72	-	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	1.91	2.00	1.25	0.60	3.09	1	1	1/2	-	-	-
T17ACB20/G	4.00	2.50	2.00	1.25	1.25	1.91	4.25	-	3.72	-	3.97	1.25	0.60	2.00	1.25	0.28	3.97	3.16	1.91	2.00	1.25	0.60	3.09	1 1/4	1 1/4	1/2	-	-	-
T18ACB12/G	3.50	3.00	2.06	1.38	1.38	1.73	4.50	0.34	-	0.34	-	-	-	2.06	1.38	0.34	4.16	3.50	1.73	2.06	1.03	-	-	3/4	3/4	-	-	-	-
T18ACB16/G	3.50	3.00	2.06	1.38	1.38	1.73	4.50	0.34	-	0.34	-	-	-	2.06	1.38	0.34	4.16	3.50	1.73	2.06	1.03	-	-	1	1	-	-	-	-
T18ACB20/G	3.50	3.00	2.06	1.38	1.38	1.73	4.50	0.34	-	0.34	-	-	-	2.06	1.38	0.34	4.16	3.50	1.73	2.06	1.03	-	-	1 1/4	1 1/4	-	-	-	-
T19ACB16/G	4.38	3.00	2.22	1.50	1.50	2.54	5.00	-	4.03	-	4.66	1.50	0.75	2.22	1.50	0.34	4.66	4.06	2.54	2.22	1.25	0.75	3.38	1	1	3/4	-	-	-
T19ACB20/G	4.38	3.00	2.22	1.50	1.50	2.54	5.00	-	4.03	-	4.66	1.50	0.75	2.22	1.50	0.34	4.66	4.06	2.54	2.22	1.25	0.75	3.38	1 1/4	1 1/4	3/4	-	-	-
T21ACB4/G	2.50	2.00	1.25	0.63	0.63	1.98	3.56	-	2.28	-	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.98	1.50	0.75	1.07	1.84	1/4	1/4	1/4	1/4	-	-
T21ACB6/G	2.50	2.00	1.25	0.63	0.63	1.98	3.56	-	2.28	-	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.98	1.50	0.75	1.07	1.84	3/8	3/8	3/8	1/4	-	-
T21ACB8/G	2.50	2.00	1.25	0.63	0.63	1.98	3.56	-	2.28	-	3.34	0.63	1.07	1.25	0.63	0.22	3.34	2.92	1.98	1.50	0.75	1.07	1.84	1/2	1/2	3/8	1/4	-	-
T22ACB6/G	3.50	2.25	1.75	1.00	1.00	2.04	3.75	-	3.22	-	3.47	1.00	1.10	1.75	1.00	0.28	3.47	3.07	2.04	1.75	1.09	1.10	2.78	3/8	3/8	3/8	3/8	-	-
T22ACB8/G	3.50	2.25	1.75	1.00	1.00	2.04	3.75	-	3.22	-	3.47	1.00	1.10	1.75	1.00	0.28	3.47	3.07	2.04	1.75	1.09	1.10	2.78	1/2	1/2	3/8	3/8	-	-
T22ACB12/G	3.50	2.25	1.75	1.00	1.00	2.04	4.00	-	3.22	-	3.72	1.00	1.10	1.75	1.00	0.28	3.72	3.07	2.04	1.75	1.09	1.10	2.78	3/4	3/4	3/8	3/8	-	-
T23ACB12/G	4.00	2.50	2.22	1.25	1.25	2.63	4.75	-	3.72	-	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.63	2.91	1.44	1.35	3.22	3/4	3/4	1/2	3/8	-	-
T23ACB16/G	4.00	2.50	2.22	1.25	1.25	2.63	4.75	-	3.72	-	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.63	2.91	1.44	1.35	3.22	1	1	1/2	3/8	-	-
T23ACB20/G	4.00	2.50	2.22	1.25	1.25	2.63	4.75	-	3.72	-	4.47	1.25	1.35	2.22	1.25	0.28	4.47	3.82	2.63	2.91	1.44	1.35	3.22	1 1/4	1 1/4	1/2	3/8	-	-
T24ACB16/G	5.00	3.00	2.50	1.50	1.50	3.38	5.87	-	4.66	-	5.53	1.50	1.60	2.50	1.50	0.34	5.53	4.91	3.38	2.50	1.50	1.60	3.75	1	1	3/4	1/2	-	-
T24ACB20/G	5.00	3.00	2.50	1.50	1.50	3.38	5.87	-	4.66	-	5.53	1.50	1.60	2.50	1.50	0.34													



Sun Cavity Bodies w/Gauge Ports - Al. & Du. Iron

Part Number	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	Port 1	Port 2	Port 3	Port 4	Port 5	Port 6
T31ACB4/G	2.75	2.25	1.38	0.63	0.63	2.72	4.75	-	2.53	-	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	2.72	1.38	0.78	1.82	1.94	1/4	1/4	1/4	1/4	-	-
T31ACB6/G	2.75	2.25	1.38	0.63	0.63	2.72	4.75	-	2.53	-	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	2.72	1.38	0.78	1.82	1.94	3/8	3/8	3/8	3/8	-	-
T31ACB8/G	2.75	2.25	1.38	0.63	0.63	2.72	4.75	-	2.53	-	4.53	0.63	1.82	1.38	0.63	0.22	4.53	3.94	2.72	1.38	0.78	1.82	1.94	1/2	1/2	1/2	1/2	-	-
T32ACB6/G	3.50	2.00	1.75	1.00	1.00	2.98	5.25	-	3.22	-	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	2.98	1.75	1.09	2.02	2.41	3/8	3/8	3/8	3/8	-	-
T32ACB8/G	3.50	2.00	1.75	1.00	1.00	2.98	5.25	-	3.22	-	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	2.98	1.75	1.09	2.02	2.41	1/2	1/2	1/2	1/2	-	-
T32ACB12/G	3.50	2.00	1.75	1.00	1.00	2.98	5.25	-	3.22	-	4.97	1.00	2.02	1.75	1.00	0.28	4.97	4.13	2.98	1.75	1.09	2.02	2.41	3/4	3/4	3/4	3/4	-	-
T33ACB12/G	4.00	2.25	2.00	1.13	1.13	3.71	6.38	-	3.66	-	6.03	1.13	2.53	2.00	1.13	0.34	6.03	5.11	3.71	2.00	1.09	2.53	2.91	3/4	3/4	3/4	3/4	-	-
T33ACB16/G	4.00	2.25	2.00	1.13	1.13	3.71	6.38	-	3.66	-	6.03	1.13	2.53	2.00	1.13	0.34	6.03	5.11	3.71	2.00	1.09	2.53	2.91	1	1	1	1	-	-
T33ACB20/G	4.00	3.00	2.00	1.50	1.50	3.71	6.50	-	3.66	-	6.16	1.50	2.53	2.00	1.50	0.34	6.16	5.11	3.71	2.00	1.09	2.53	2.91	1 1/4	1 1/4	1 1/4	1 1/4	-	-
T52ACB6/G	3.50	2.25	1.75	1.00	1.00	4.40	6.25	-	3.22	-	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	4.40	1.75	1.06	3.43	2.44	3/8	3/8	3/8	3/8	3/8	3/8
T52ACB8/G	3.50	2.25	1.75	1.00	1.00	4.40	6.25	-	3.22	-	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	4.40	1.75	1.06	3.43	2.44	1/2	1/2	1/2	1/2	1/2	3/8
T52ACB12/G	3.50	2.25	1.75	1.00	1.00	4.40	6.25	-	3.22	-	5.97	1.00	3.43	1.75	1.00	0.28	5.97	5.32	4.40	1.75	1.06	3.43	2.44	3/4	3/4	3/4	3/4	3/4	3/8
T53ACB12/G	4.00	3.00	2.00	1.50	1.50	5.52	7.63	-	3.66	-	7.28	1.50	4.35	2.00	1.50	0.34	7.28	6.63	5.52	2.00	0.94	4.35	3.06	3/4	3/4	3/4	3/4	3/4	1/2
T53ACB16/G	4.00	3.00	2.00	1.50	1.50	5.52	7.63	-	3.66	-	7.28	1.50	4.35	2.00	1.50	0.34	7.28	6.63	5.52	2.00	0.94	4.35	3.06	1	1	1	1	1	1/2
T54ACB20/G	5.00	4.00	2.50	2.00	2.00	7.22	10.00	-	4.66	-	9.66	2.00	5.66	2.50	2.00	0.34	9.66	8.75	7.22	2.50	1.00	5.66	4.00	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	3/4
T61ACB4/G	2.75	2.25	1.38	0.63	0.63	3.94	5.62	-	2.53	-	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	3.94	1.38	0.72	3.03	2.03	1/4	1/4	1/4	1/4	1/4	1/4
T61ACB6/G	2.75	2.25	1.38	0.63	0.63	3.94	5.62	-	2.53	-	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	3.94	1.38	0.72	3.03	2.03	3/8	3/8	3/8	3/8	3/8	1/4
T61ACB8/G	2.75	2.25	1.38	0.63	0.63	3.94	5.62	-	2.53	-	5.40	0.63	3.03	1.38	0.63	0.22	5.40	4.88	3.94	1.38	0.72	3.03	2.03	1/2	1/2	1/2	1/2	3/8	1/4
T62ACB6/G	3.50	2.25	1.75	1.00	1.00	4.33	6.25	-	3.22	-	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	4.33	1.75	1.00	3.38	2.50	3/8	3/8	3/8	3/8	3/8	3/8
T62ACB8/G	3.50	2.25	1.75	1.00	1.00	4.33	6.25	-	3.22	-	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	4.33	1.75	1.00	3.38	2.50	1/2	1/2	1/2	1/2	3/8	3/8
T62ACB12/G	3.50	2.25	1.75	1.00	1.00	4.33	6.25	-	3.22	-	5.97	1.00	3.38	1.75	1.00	0.28	5.97	5.31	4.33	1.75	1.00	3.38	2.50	3/4	3/4	3/4	3/4	3/8	3/8
T63ACB12/G	4.00	2.25	2.00	1.13	1.13	5.30	7.75	-	3.66	-	7.41	1.13	4.13	2.00	1.13	0.34	7.41	6.63	5.30	2.00	1.09	4.13	2.91	3/4	3/4	3/4	3/4	1/2	3/8
T63ACB16/G	4.00	2.25	2.00	1.13	1.13	5.30	7.75	-	3.66	-	7.41	1.13	4.13	2.00	1.13	0.34	7.41	6.63	5.30	2.00	1.09	4.13	2.91	1	1	1	1	1/2	3/8
T63ACB20/G	4.50	3.00	2.25	1.50	1.50	5.30	8.00	-	4.16	-	7.66	1.50	4.13	2.25	1.50	0.34	7.66	6.63	5.30	2.25	1.09	4.13	3.41	1 1/4	1 1/4	1 1/4	1 1/4	1/2	3/8
T64ACB16/G	5.00	3.00	2.50	1.50	1.50	6.51	9.62	-	4.66	-	9.28	1.50	5.01	2.50	1.50	0.34	9.28	8.21	6.51	2.50	1.25	5.01	3.75	1	1	1	1	3/4	1/2
T64ACB20/G	5.00	3.00	2.50	1.50	1.50	6.51	9.62	-	4.66	-	9.28	1.50	5.01	2.50	1.50	0.34	9.28	8.21	6.51	2.50	1.25	5.01	3.75	1 1/4	1 1/4	1 1/4	1 1/4	3/4	1/2
T162ACB4/G	1.88	2.00	1.06	0.63	0.63	0.67	2.00	-	1.66	-	1.78	-	-	1.06	0.63	0.22	1.78	1.50	0.63	0.84	1.35	-	-	1/4	1/4	-	-	-	-
T162ACB6/G	1.88	2.00	1.06	0.63	0.63	0.67	2.00	-	1.66	-	1.78	-	-	1.06	0.63	0.22	1.78	1.50	0.63	0.84	1.35	-	-	3/8	3/8	-	-	-	-
T162ACB8/G	2.00	1.75	1.23	0.63	0.63	0.67	2.25	-	1.78	-	1.22	-	-	1.23	0.63	0.22	2.03	1.53	0.63	0.91	1.35	-	-	1/2	1/2	-	-	-	-
T163ACB4/G	2.25	1.75	1.10	0.63	0.63	1.28	2.75	-	2.03	-	2.53	0.63	0.46	1.10	0.63	0.22	2.53	2.16	1.28	1.25	0.63	0.50	1.66	1/4	1/4	1/4	-	-	-
T163ACB6/G	2.25	1.75	1.10	0.63	0.63	1.28	2.75	-	2.03	-	2.53	0.63	0.46	1.10	0.63	0.22	2.53	2.16	1.28	1.25	0.63	0.50	1.66	3/8	3/8	3/8	-	-	-
T163ACB8/G	2.75	1.75	1.38	0.63	0.63	1.28	3.00	-	2.53	-	2.78	0.63	0.46	1.38	0.63	0.22	2.78	2.16	1.28	1.50	0.88	0.50	1.91	1/2	1/2	3/8	-	-	-

Custom Products
Standard Manifolds
Cover Plates
Valve Adaptors
Subplates
Servo Valve Subplates
Tapping Plates
Cartridge Valve Cavity Bodies
Header and Junction Blocks
Technical Information

Specifications, descriptions, and dimensional data are subject to correction or change without notice or incurring obligation. Download latest catalog page revisions at www.daman.com.